

# **Rockfon® Education Premium™**





#### **Features & Benefits**

- Smooth white finish, enhancing educational environments with a sleek, contemporary look
- Excellent sound absorption with NRC 0.90, fostering a conducive learning atmosphere
- Class A fire performance with 0 Smoke Development and 5 Flame Spread per ASTM E84
- UL GREENGUARD Gold certified for low chemical emissions
- Stone wool is inherently mold and mildew resistant and does not include antimicrobials
- Compliant with the Build America, Buy America Act (BABAA)

## **Applications**

- Library
- Media Center





High Acoustic Absorption



Class A Fire Performance



Moisture and Sag Resistance



Smooth, Modern Aesthetics



Mold and Mildew Resistance



30-year Warranty Applies to All Stone Tiles and Panels





# Rockfon® Education Premium™



# **High Performance Factors**

Base Material	Stone Wool	
Surface	Smooth	
Fire	Class A	
Performance	Tested to US Standard ASTM E84:	Flame Spread Index: 0
		Smoke Developed Index: 5
	Canadian Standard CAN/ULC S102:	Flame Spread Index: 5
		Smoke Developed Index: 0
Warranty	30-Year Tile Warranty	

Mold & Mildew
Resistance
Inherently Resistant
(applies to stone wool substrate and tile surfaces)
Tested to ASTM D3273: 10
(Scale of 0 to 10, 10 being highest performing)
Tested to ASTM C1338: Pass
(Pass or Fail, Stone Wool Tiles Pass)

Sag Resistance
Won't Sag or Warp Even in 100% Relative Humidity
Tested to ASTM C367

Low VOC
UL GREENGUARD Gold Certified



### **Standard Panels**














Packaging Information

Edge Designation	Item Number	Modular Size (nominal)	NRC	CAC	Fire Class	Mold & Mildew Resistance	Sag Resistance (relative humidity)	Light Reflectance	Embodie Per 1m² (kg CO <sub>2</sub> - eq)	d Carbon Per 1ft <sup>2</sup> (kg CO <sub>2</sub> - eq)	Low VOC	Recyclable	lbs/ sqft	sqft/ carton
SQ.	43100	2' x 2' x 1""	0.90	22	А	~	up to 100%	0.84	3.49	0.325	<b>√</b>	~	0.69	64
Square Lay-In	43101	2' x 4' x 1"	0.90	22	А	<b>✓</b>	up to 100%	0.84	3.49	0.325	<b>√</b>	<b>✓</b>	0.69	64
SLN	43200	2' x 2' x 1""	0.90	22	А	<b>✓</b>	up to 100%	0.84	3.49	0.325	<b>√</b>	<b>✓</b>	0.69	32
Square Tegular Narrow	43201	2' x 4' x 1"	0.90	22	А	<b>✓</b>	up to 100%	0.84	3.49	0.325	✓	<b>✓</b>	0.69	64
SL SL	43300	2' x 2' x 1"	0.90	22	А	<b>~</b>	up to 100%	0.84	3.49	0.325	<b>√</b>	<b>✓</b>	0.69	32
Square Tegular	43301	2' x 4' x 1"	0.90	22	А	<b>✓</b>	up to 100%	0.84	3.49	0.325	<b>√</b>	<b>✓</b>	0.69	64

## **Product Compatibility**

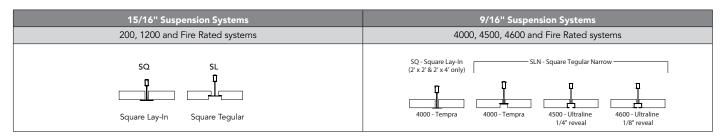

# **Rockfon® Education Premium**™

# Accessories

	<b>5</b>	Rockfon Part Product		Packaging		
	Detail	Number	Number	Product Description	Pcs/ Ctn	Lbs/ Ctn
	I.	250348	935.00	Universal Hold Down Clip	1000	16
General Clips*	A	237952	491.00	Hold Down Clip for 3/4" - 1-1/4" Panels (Blue)	150	2
		237954	492.00	Hold Down Clip for 1-1/2" Panels (Grey)	100	2
	(P)	250324	426.01	Butterfly Retention Clip for 0" - 1" Panels	200	15
		250325	427.01	Butterfly Retention Clip for 1" - 2" Panels	150	15
Paint		307988	RFN941	Edge Paint for Field Cut Panels White – 8 oz	Bottle	1
Tile P	Workshop at was a second or wa	307989	RFN941Q	Edge Paint for Field Cut Panels White – 32 oz	Can	1

<sup>\*</sup>Clips should be chosen as per tile thickness

## **Scan for Full Accessories Guide**



# **Rockfon® Education Premium™ Properties**

#### **Material**

Stone wool (Mineral Wool) ceiling tiles with factory applied water-based paint on glass scrim surface.



#### **ASTM E1264 Classification**

ASTM E1264 (2022): Type IV, Form 3, Pattern G ASTM E1264 (2023): Type A, Form A2.3, Pattern G



#### **Fire Performance**

Rockfon® Education Premium™ tiles are tested for Surface Burning Characteristics to UL 723 (ASTM E84) for the US and CAN/ULC-S102 for Canada, and achieve:

Tested to US Standard Flame Spread Index: 0 UL 723 (ASTM E84): Smoke Developed Index: 5

Canadian Standard Flame Spread Index: 5
CAN/ULC S102: Smoke Developed Index: 0



#### **Mold and Mildew Resistance**

Stone wool is inherently resistant to mold and mildew without added antimicrobials. Both, tile surface and substrate, are tested to:

- ASTM D3273 (Standard Test Method for Resistance to Growth of Mold on the Surface of Interior Coatings)
- ✓ ASTM C1338 (Standard Test Method for Determining Fungi Growth Resistance of Insulation Materials and Facings)



#### **Humidity Resistance**

Stone wool ceiling tiles are inherently humidity resistant and are tested to ASTM C367 (Standard Test Methods for Strength Properties of Prefabricated Architectural Acoustical Tile or Lay-In Ceiling Panels) and won't sag or warp even in 100% relative humidity



#### Cleaning

√ Vacuum



## **Thermal Resistance**

R 3.47 hr.ft².°F/Btu per 1 inch (I-P) R 0.61 m².K/W per 25.4 mm (SI)



## **Tile Directionality**

Rockfon® Education Premium™ tiles are directional and must be installed according to backside arrow direction. The arrow can be turned 180°, not 90°



#### Warranty

30-Year Limited Product Warranty. See rockfon.com

# Sustainability



#### **Transparency**

- ✓ Environmental Product Declaration (Product-Specific, Type III)
- ✓ Health Product Declaration
- ✓ Declare Label

Applicable to all edge types



#### **Low-Emitting Materials**

UL GREENGUARD Gold certified for low VOC (chemical) emissions and meet the California Department of Public Health (CDPH) Standard Method v1.2-2017 for offices and classroom environments



#### **Embodied Carbon**

Global Warming Potential (GWP) kg of  $CO_2$ -eq (per functional unit) from stages A1 - A3 for SQ Edge: 3.49 kg  $CO_2$ -eq (per  $1m^2$ )\* / 0.325 kg  $CO_2$ -eq (per  $1f^2$ ) For all other edge types, refer to p. 2



#### **Rockcycle - Closed Loop Recycle Program**

All stone wool ceiling tiles are eligible for the Rockcycle program. Please contact rockcycle@rockfon.com for more information



#### **Discover Rockfon® Education Premium™**

on Ecomedes and see how it aligns with the Common Materials Framework (CMF)



BIM/Revit objects available at:

https://rockfon.ecomedes.com/?collection=Education%20Premium